


Poklop PAMREX 800 Safety D400 class Square frame – Bez ventilace

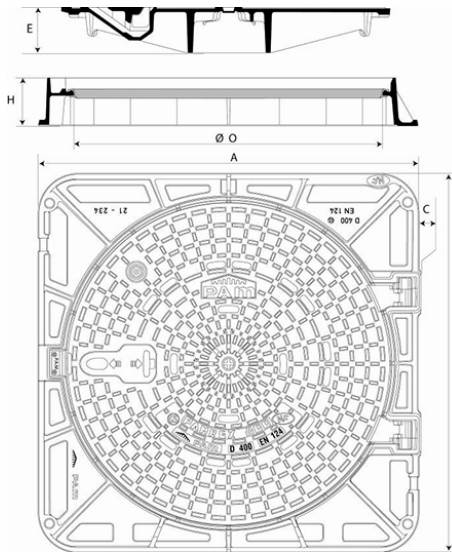

AxA	C	E	H	O	Hmotnost víka	Celková hmotnost	Balení	Kód
mm	mm	mm	mm	mm	kg	kg		
1000x1000	7	115	125	800	73.0	131.0	10	CDPA80MF

Material and coating:

- Frame in Ductile Iron EN GJS 400-15: bituminous coating
- Cover in Ductile Iron EN GJS 400-15: water base coating
- Ring in elastomer

Field of application:

- D400 class (Group 4) according to standard EN124-2, carriageways of roads, hard shoulders and parking areas for all types of road vehicles.
- Heavy traffic zones and frequent visits.

Main characteristics:

- Compliance with EN124-2:2015 testified by SG PAM as the standard allows it
- Hinged cover and ergonomic handling box
- Interchangeable covers
- Frame fitted for optimized bedding

PAMREX MUNICIPAL CASTINGS		09/17/2021
		VD40RENPMX427

- Opens to 130°, blocks at 90° when closing
- Identification of the versions
- Operating Key C24

Conformity:

Saint-Gobain PAM attests that:

- the above mentioned products are manufactured in compliance with specifications, materials & characteristics as per EN124-2 : 2015 standard
- the features and performances of the above mentioned products are controlled and comply with requirements of EN124-1 : 2015 standard

The PAM brand affixed on these related products materialises this attestation of conformity.

Security:

- Quarter turn locking system
- Limitation of the run-off water entries
- Opening / Closing assistance