




BLUTOP Vi Gasket

DN75-125

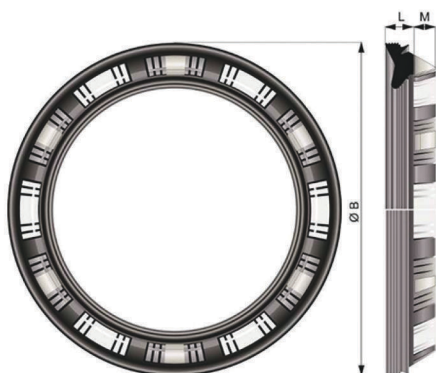

DN140-160

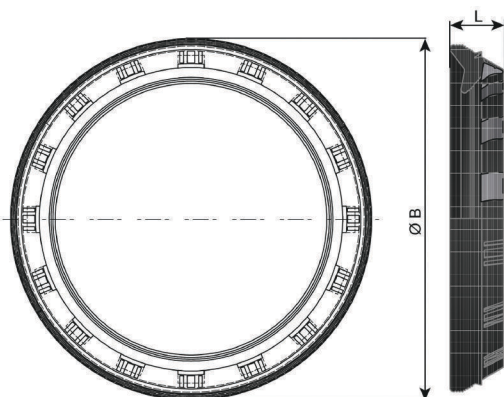

DN75-125



DN140-160



DN/OD	L	M	Ø B	Hmotnost	Kód
<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>kg</i>	
75	13.8	8.5	100.2	0.068	JXL75CA
90	13.7	8.4	116.0	0.077	JXL90CA
110	13.7	9.4	136.3	0.093	JXM11CA
125	16.5	8.9	153.8	0.118	JXM12CA
140	18.1	9.8	173.0	0.168	Kontaktujte nás
160	18.0	9.8	193.0	0.221	Kontaktujte nás

 blutop DRINKING WATER DN 75 to 160	 PAM SAINT-GOBAIN	12/15/2021
---	---	------------

Field of use:

- For drinking water supply networks
- For BLUTOP ductile iron pipes and fittings
- Manufactured to last more than 100 years
- Total compatibility with drinking water. All the constituent materials have “Attestation de Conformité Sanitaire” in France (ACS), WRAS and DWI agreements in UK, DVGW agreement in Germany

Main characteristics:

- Elastomer quality : EPDM reinforced with plastic inserts
- In conformity with WA type of EN 681-1
- Conform to ISO 16631-2016
- Locking secured by metallic inserts